

QUALITY BATHROOM PARTITIONS

Strength, Value, Style

1709 Newport Circle, Santa Ana, CA 92705

Tel: 714-549-2015 | Fax: 714-549-2087

www.accutecmfg.com

SOLID PLASTIC TOILET PARTITIONS (POLYMER)



SOLID PLASTIC TOILET PARTITIONS (POLYMER)

Solid plastic toilet partitions are manufactured from (HDPE) high density polyethylene resin which gives it a clean solid look with homogenous color through out. HDPE material will not rust or delaminate and has a scratch resistant surface, also perfect for showers, dressing stalls and public places where high traffic is expected such as schools, parks, gyms, hospitals, sport arenas and airports.

ACCUTEC MANUFACTURING'S: Solid plastic toilet partitions shall be high-density polyethylene (HDPE) polymer with homogenous color through out. 1" thick material with ¼" radius machined edges for doors, panels, pilasters and screens. 55" high doors and panels with 82" high pilasters. An aluminum heat sinc strip shall be attached as standard to the bottom of all doors and panels.

Our partitions come in a wide variety of colors and mounting options to meet any desired or specified look and function.

HINGES: Shall include heavy-duty wrap around cam-action hinge, or Integral hinge system that permits door to return to a pre-set position when not locked. Hinges, strike and keeper shall be Aluminum to resist corrosion, and shall be through bolted with vandal resistant barrel nuts and shoulder screws. Hinge and slide latch assembly shall allow emergency access by lifting door from bottom. Other types of hinges available are continuous hinges in Aluminum and in stainless steel.

MOUNTING HARDWARE: Brackets are also offered in many different types of materials and styles such as, aluminum stirrup, full height Plastic and stainless steel. Pilasters shall come with a solid plastic or stainless steel shoe to cover the pilaster mounting system.

WARRANTY: Accutec Manufacturing guarantees its solid plastic HDPE material against breakage, corrosion, and delamination for 15 YEARS from the date of receipt by the customer. If material is found defective during that period, the material will be replaced at no cost. No credits or allowances shall be issued for any labor or expenses relating to the replacement of these components covered under the warranty plan.

POLYMER (HDPE) COLOR SELECTION GUIDE



Sahara Beige



Sky Blue



Storm Cloud Grey



Cumulus White



Pacific Blue



Cabernet Burgundy



Midnight Black



Fossil



Paisley



Mars Nebula



Jupiter Nebula



Meteor Nebula



Earth Nebula



Peacock Green



Neptune Nebula



Atlantis Blue

SOLID PLASTIC HARDWARE



Wrap Around Hinges



Integral Hinge



Stainless Steel Piano Hinge



Aluminum Stirrup Brackets



Aluminum Continuous



Plastic Brackets



Stainless Steel Continuous



Plastic Pilaster Shoe



Stainless Steel Pilaster Shoe



Headrail and End Cap



Slide Latch and Keeper



Coat Hook, Door Pull, Bumper

PLASTIC LAMINATE & SOLID PHENOLIC



PLASTIC LAMINATE

PANELS & DOORS: Constructed of 1/16" (.50) high pressure plastic laminate, they meet or exceed the performance requirements stated in NEMA publications bonded under pressure to a 7/8" solid 45 lb. density industrial grade board core. Finished panels shall be 1" thick with two face plastic laminate applied over self-edge banding.

PILASTERS: Constructed as specified above, but the finished thickness goes from 1" to 1 1/4". Heavy bar or "L" brackets at the bottom are optional.

HARDWARE:

- Chromed Zamac
- Concealed Stainless Steel
- Stainless Steel Institutional (continuous hinges & brackets)
- Continuous Aluminum Brackets & Door Hardware (picture not shown)

COLOR: Selections from Wilson Art, Formica, Pionite, Nevamar, or any other sources specified by the customer.

SOLID PHENOLIC

DOORS & PILASTERS: Constructed of 3/4" thick solid phenolic core with multiple resin-impregnated kraft, color, and clear Melamine surface sheets fused and pressurized at high temperature. Edges are polished black phenolic.

PANELS: Constructed of 1/2" or 3/4" thick solid phenolic core with the same specifications as the doors and pilasters.

URINAL SCREENS: Constructed of either 1/2" or 3/4" thick solid phenolic based upon customer's request.

HARDWARE:

- Stamped Stainless Steel
- Stainless Steel Institutional (continuous hinges & brackets)
- Continuous Aluminum Brackets & Door Hardware (picture not shown)

COLOR: Selections from Trespa, Arborite, Formica, Pionite & Nevamar, or any other sources specified by the customer.

STANDARD PHENOLIC COLOR SELECTION GUIDE



E0-00 White



CO-09 Black Craquele



E0-02 Silver Grey



S0-00 White



E0-09 Black



S0-04 Mid Grey



E3-01 Sand



PA-2 Patina Rusty Red



E25-04 Steel blue



PI-2 Grit Blue Grey



W78-01 Wild Cherry



W71-03 Silver Maple



Almond



Smog Grey



Desert Beige

* Also available in a full range of colors from the following manufacturers: Arborite, Wilsonart, Formica and Pionite.

PHENOLIC COLOR CORE THRU



Pacific Blue



Red Clay



Camel



Moss

* Actual colors may vary slightly from picture shown due to printing limitations.


FLOOR MOUNTED PARTITIONS




FLOOR MOUNTED PARTITIONS

PLASTIC LAMINATE SERIES PL - 710
SOLID PHENOLIC SERIES SP - 710

This type of partition system allows for unobstructed spacious design while incorporating simplicity in form. The floor mounted partitions are ideal for low ceiling restrooms, but they still allow a wide range of design features when used in restrooms that have high ceilings. The partitions require a minimum 4" deep concrete base for secure attachment.

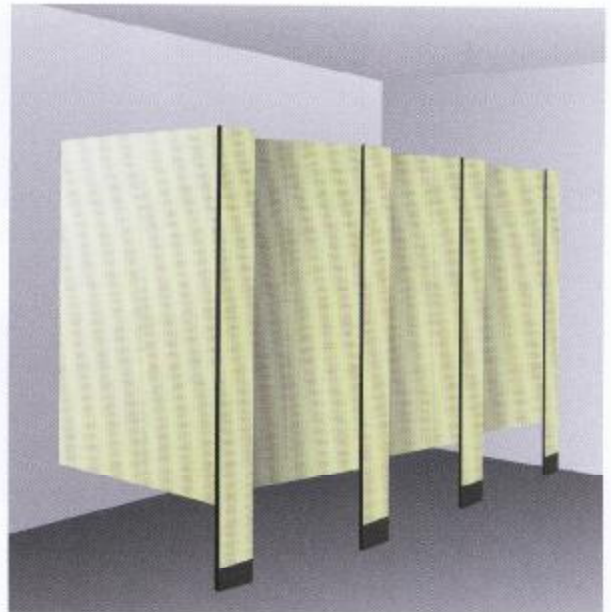

Steel Bar Floor Mounting*

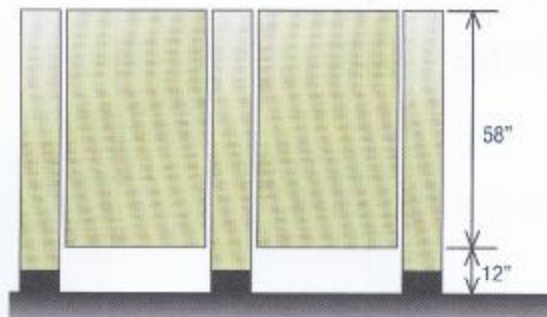

Front View of Stalls




Side View of Stalls

Pilaster will have a 4" high #4 satin finish stainless steel type 304 shoe. Pilaster are to be secured to the floor by a 5/16 x 1" zinc plated steel anchor bar mechanism. Tension nuts are used to apply equal pressure to all points of mounting system. Expansion anchors nuts and washers are provided.

* This is a standard leveling device for all phenolic partitions.



OVERHEAD BRACED PARTITIONS

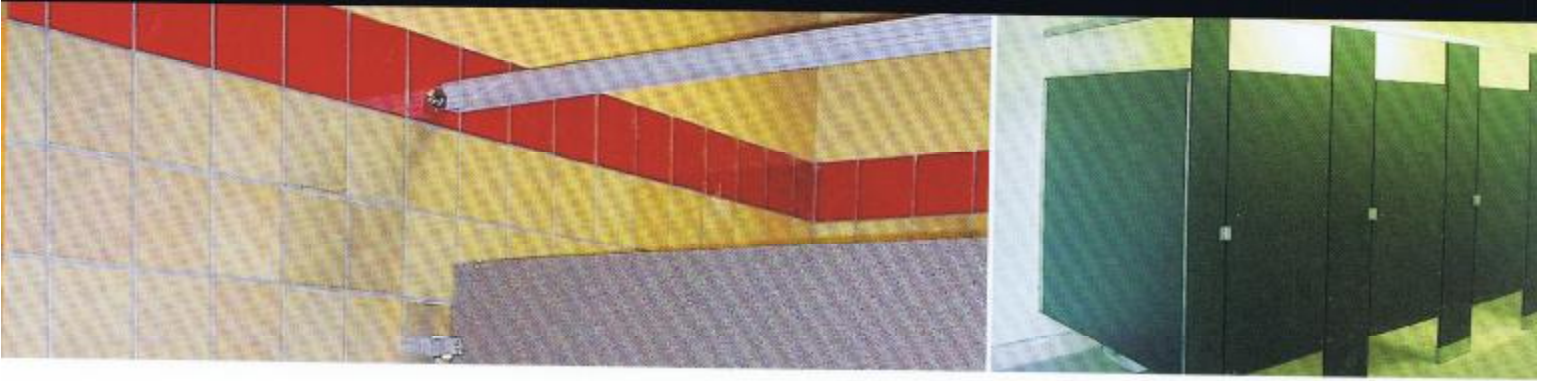


OVERHEAD BRACED PARTITIONS

PLASTIC LAMINATE SERIES PL - 720
SOLID PHENOLIC SERIES SP - 720

This overhead braced type of partition is the most popular and typically the best solution for a majority of facilities requiring bathroom partitions. Installation is simple and easy for new or remodeled restrooms, due to the fact that no changes need to be made to the floor or the ceiling. Because of the way the pilaster is secured to the floor, the setup allows for a more secure and stronger partition. In addition, the anti-grip head-rail along with the floor mount allows for a more rigid installation.

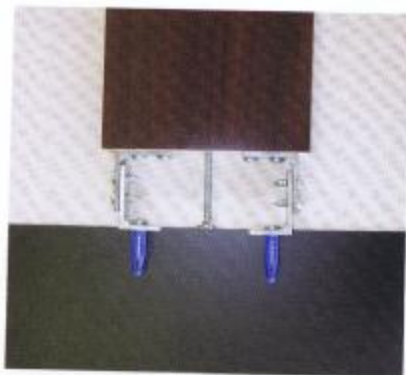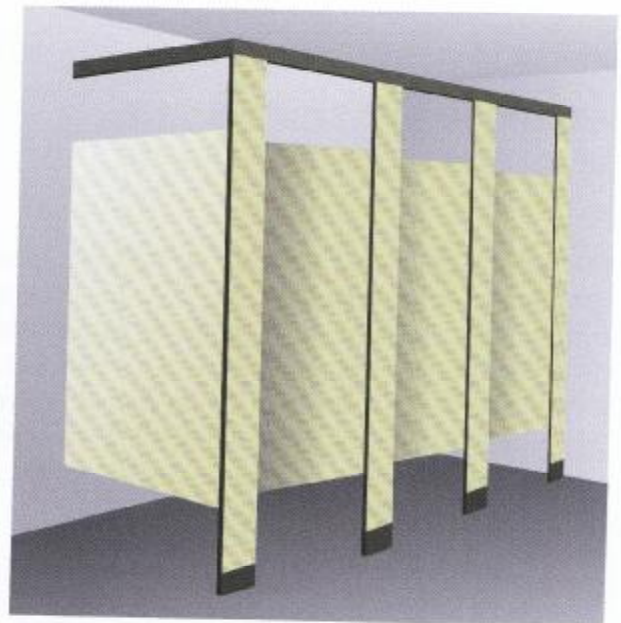

L Bracket Mounting*

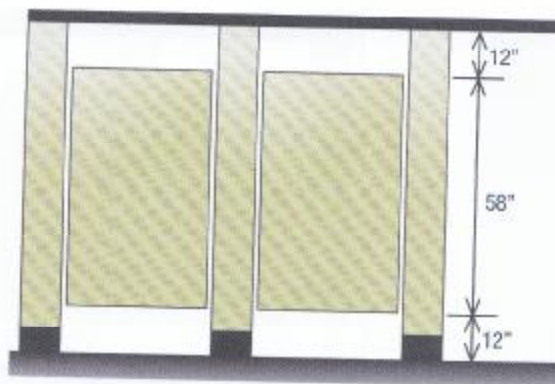

Front View of Stalls



Side View of Stalls

Pilaster will have a 4" high #4 satin finish stainless steel type 304 shoe. Pilasters are to be secured to the floor by non-ferrous "L" bracket fastened to the bottom of the pilaster and to the floor with #14 x 2" zinc plated metal screw. Anodized aluminum anti-grip headrail will brace the pilasters top.

* Only for plastic laminate partitions, solid phenolic partitions will have steel bar mounting.



CEILING HUNG PARTITIONS




CEILING HUNG PARTITIONS

PLASTIC LAMINATE SERIES PL - 730
SOLID PHENOLIC SERIES SP - 730

This type of bathroom partition is designed to allow easy access to an unobstructed floor. Because of its construction, the partitions require less time needed to clean and maintain restroom floors. This style requires a structural support beam in the ceiling to allow the attachment of the pilasters. The beam decreases the sway factor of the ceiling hung partitions and provides for maximum rigidity.

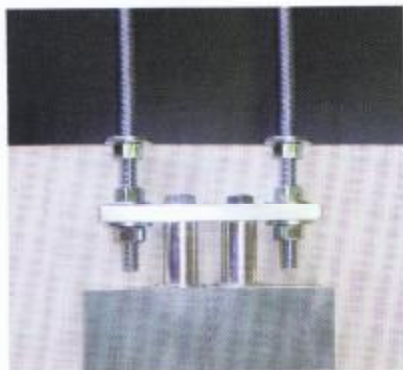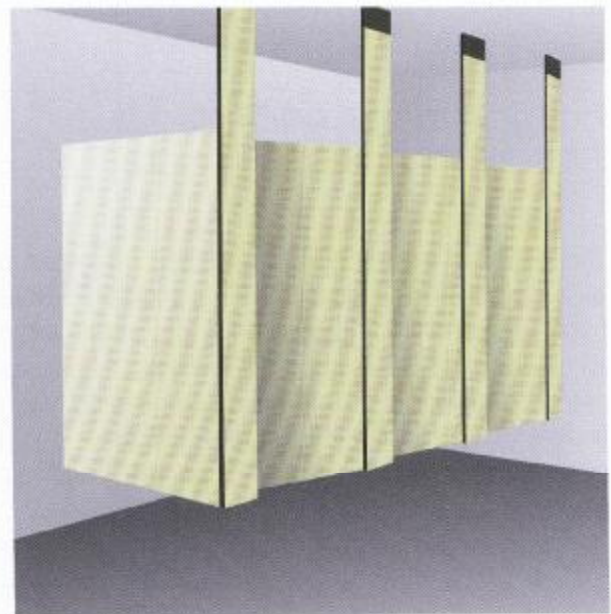

Steel Bar Ceiling Mounting

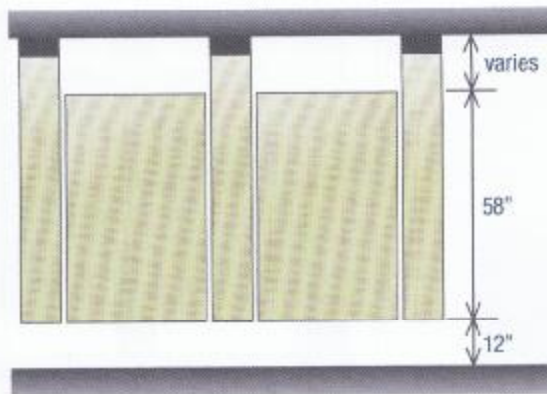

Front View of Stalls



Side View of Stalls

Pilaster will have a 4" high #4 satin finish stainless steel type 304 shoe. Pilasters are to be secured to structural ceiling metal beam or wood beam (supply by others) by a 5/16 x 1" zinc plated steel anchor bar mechanism using 3/8 all thread steel rod and pilaster leveling nuts lock washers are to be used with all nuts to prevent loosening by vibration.



FLOOR TO CEILING BRACED PARTITIONS




FLOOR TO CEILING BRACED PARTITIONS

PLASTIC LAMINATE SERIES PL - 740
SOLID PHENOLIC SERIES SP - 740

This type of bathroom partition style is the solution for harsh environments and heavily used restrooms. Due to the fact that the partitions are connected at two points (at the floor and at the ceiling), it provides an increase in rigidity and strength. This setup allows for better durability and long lasting performance for the partitions. For installation at the floor, a minimum 3" concrete depth is required. This type of partition system is designed for ceilings up to 10 feet in height and give you the option of mounting a steel bar or a "L" bracket at floor attachment.

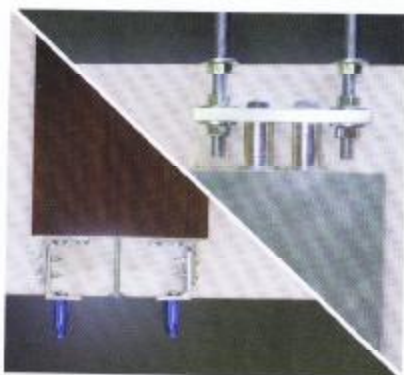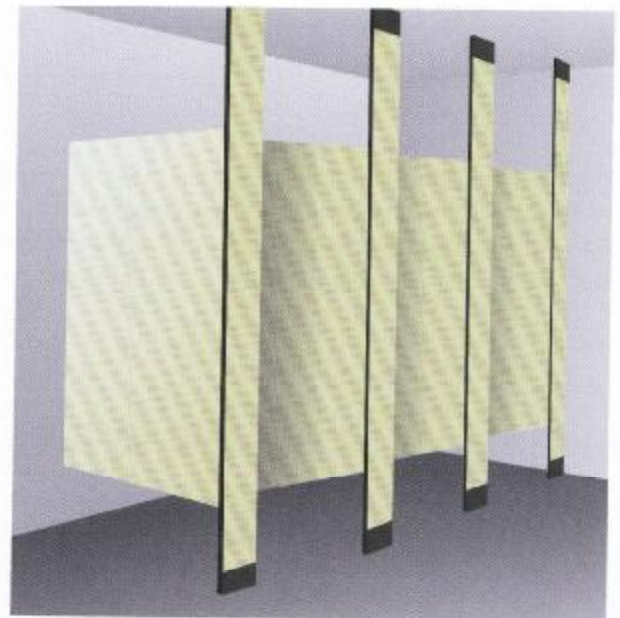

L Bracket Mounting /
Steel Bar Mounting, *optional*

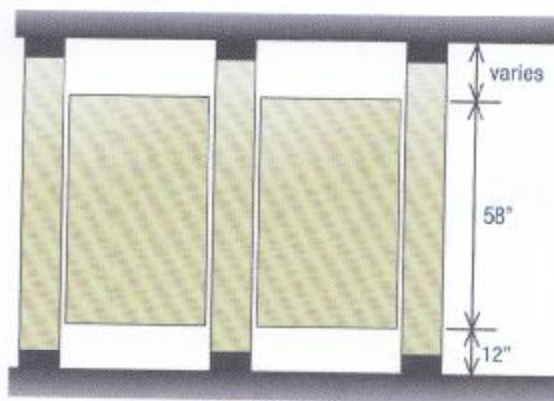

Front View of Stalls




Side View of Stalls

Pilaster will have a 4" high #4 satin finish stainless steel type 304 shoe. Pilasters are to be secured to the floor by non-ferrus "L" bracket fastened to the bottom of the pilaster and to the floor with #14 x 2" zinc pilasters. Pilasters are to be secured to structural ceiling metal beam or wood beam (supplied by others) by a 5/16 x 1" zinc plated steel anchor bar mechanism using 3/8 all thread steel rod and pilaster leveling nuts. Lock washers are to be used with all nuts to prevent loosening by vibration. Lated metal screw.

HARDWARE

STANDARD

Standard hardware includes door latch, door keeper, coat hook, through-bolted hinges, and mounting hardware made of bright-polished chrome-plated zamak. For emergency access, door lifts from the outside. 4" height satin-finish stainless #304 steel shoes.

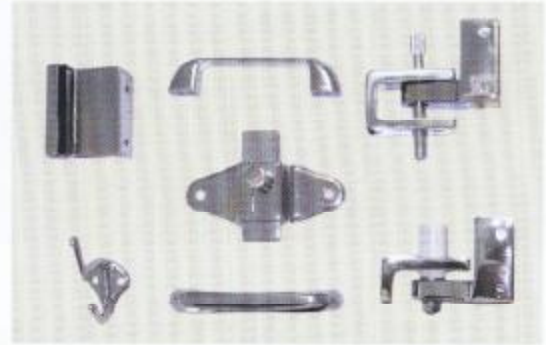

STAINLESS STEEL

Heavy duty type 304 satin finish stainless steel. Hinge can be adjusted for a partial opening or self closing door; for emergency access, door lifts from outside. Threaded inserts are factory installed for securing hinges or through bolts are also available. 4" height satin-finish stainless #304 steel shoes.



CONTINUOUS STAINLESS STEEL

Extra heavy duty, type 304 satin finish stainless steel. Continuous brackets and u-channels run full height of panels and pilasters. Self closing hinges run full height of doors. All fasteners to be tamper proof. 4" height satin-finish stainless #304 steel shoes.



OPTIONAL HARDWARE

STEELCORE PILASTERS

11-gauge steel core welded to 3/8 x 1" steel leveling bar, forming a single structural unit.

STAINLESS STEEL EDGES

Stainless steel edge trim provides a distinctive accent and protect edges from been chipped. Plastic laminated surfaces routed for a flush fit of stainless steel edge.



URINAL SCREENS



Wall Hung Urinal Screen



Floor To Ceiling Urinal Screen



Floor Anchored Urinal Screen

WARRANTY

PLASTIC LAMINATE

AccuTec laminated plastic toilet partitions are warranted under a limited 3 year warranty from date of purchase against delamination and defects in fabrication and workmanship when the materials are properly installed, used and serviced in the normal way.

SOLID PHENOLIC

Accu Tec phenolic toilet and shower compartments are warranted under a limited 15 year warranty from the date of purchase against delamination and defects in factory workmanship when the materials are properly installed, used and serviced in the proper way.

Accu Tec MFG, inc. at its exclusive option, can either repair or replace such defective panels, doors, stiles and screens, without charge.

MAINTENANCE

LAMINATED PLASTIC & SOLID PHENOLIC PARTITIONS

Clean by wiping with non abrasive detergent and damp cloth or sponge. Difficult stains can be removed using a mild soap and detergent and a soft-bristled brush.

Difficult stains that resist any of the above cleaning methods may require the use of licker thinner. Stop applying thinner if the stain appears to not be going away and the color of the laminate has been affected. Extended contact of the laminate to the thinner may cause discoloration.



1709 Newport Circle, Santa Ana, CA 92705
Tel: 714-549-2015 | Fax: 714-549-2087
www.accutecmfg.com